



# Pouch Seal Strength Comparison for Uncoated 1073B — ASTM F88



### Tyvek® 1073B - Control

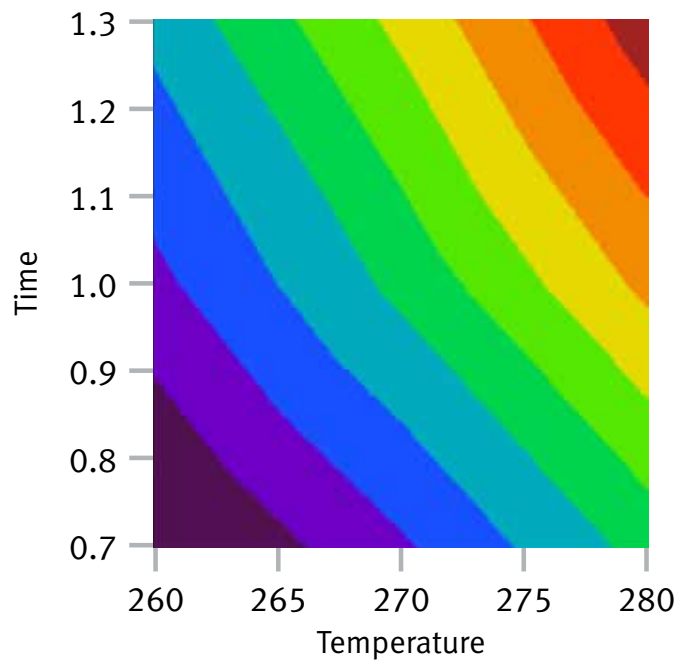

### Sample A

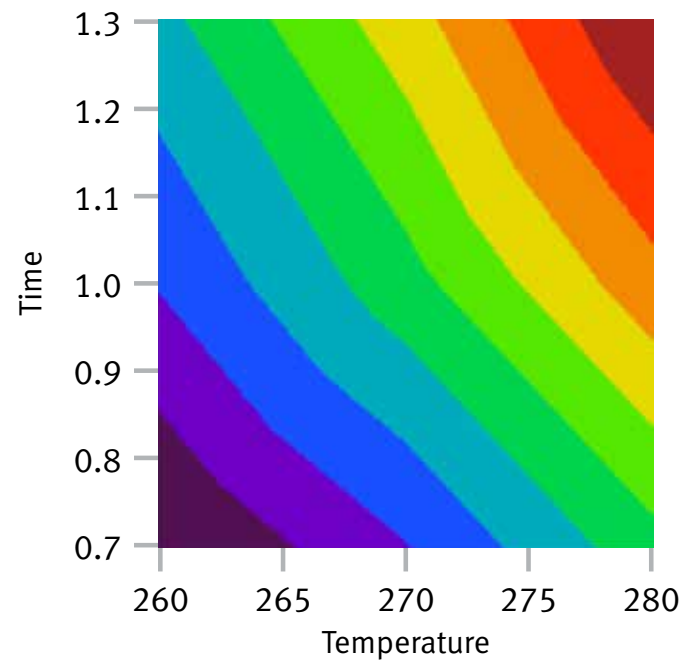


Film was 100-gauge bi-axial nylon with HDPE.  
Tested per ASTM F88. Free tail (i.e., unsupported)  
N>500 data point averages



# FFS Blister Pack Seal Strength Comparison for Uncoated 1059B — ASTM F88



### Tyvek® 1059B - Control

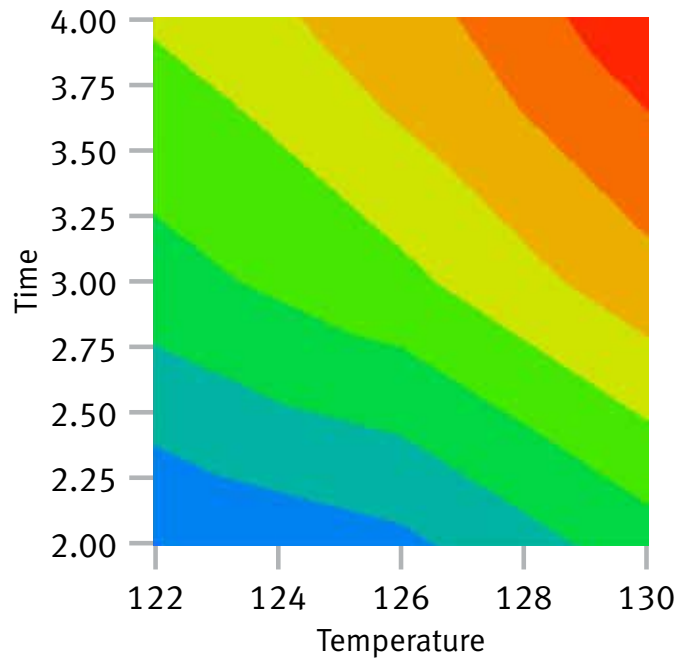

### Sample A

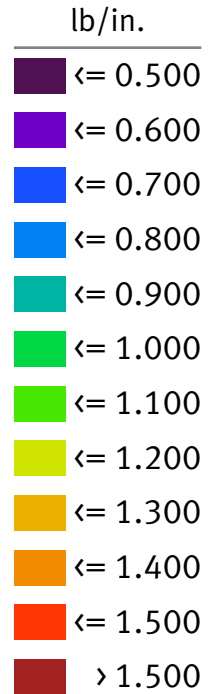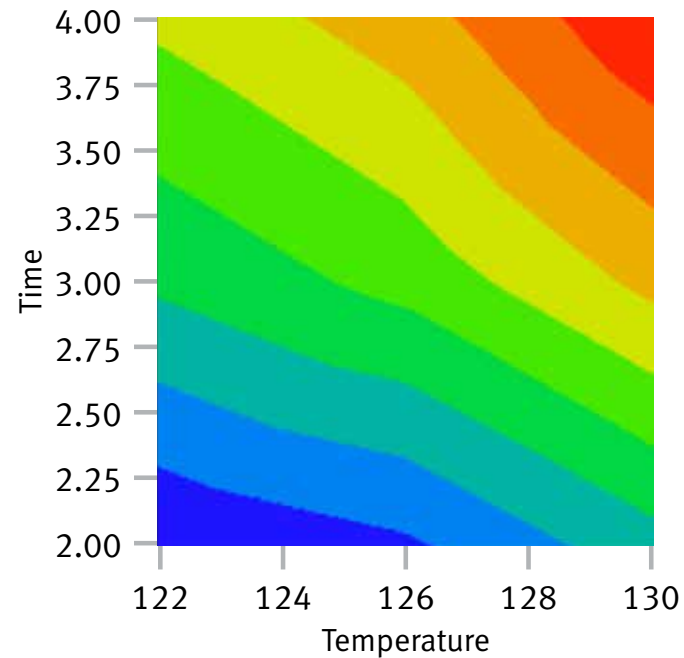

Film was 100-gauge multi-layer nylon with peelable sealant.  
Tested per ASTM F88. Free tail (i.e., unsupported)  
N>500 data point averages