

# DuPont™ Cyrel® 3000 Modular InLiner System

## Plate Processing Through Finishing in One Linear Design

[DuPont Packaging Graphics](#) continues to be a global technology leader in the development and supply of flexographic printing systems. Our R&D team continues to develop innovative new solutions to help our customers expand their business by taking advantage of new and profitable opportunities in the growing flexographic packaging market. The DuPont Packaging Graphics portfolio of products includes DuPont™ Cyrel® brand photopolymer plates ([analogue](#) and [digital](#)), [Cyrel® platemaking equipment](#), Cyrel® round sleeves, Cyrel® plate mounting systems and the revolutionary [Cyrel® FAST thermal system](#).

DuPont™ Cyrel® Systems: Higher quality at high speed.

**The DuPont™ Cyrel® 3000 Modular InLiner provides a 25% increase in platemaking productivity.**



DuPont™ Cyrel® Modular InLiner System

### DuPont™ Cyrel® 3000 Modular InLiner System

#### Benefits

- Modular - combines processor, dryer, light finisher and stacker in a streamlined, linear design
- High productivity- more than 120 plates per day
- Durable- a well-engineered machine that includes a pre-wash station to washout the digital layer
- Remote diagnostics- on-line preventative maintenance reduces or prevents downtime
- Touch screen- intuitive, pictogram based operation
- Video monitoring of all plate transfer steps

#### Product Features

DuPont™ Cyrel® 3000 Modular InLiner is capable of processing more than 120 high quality photopolymer plates per day, 24/7. The integrated system consists of four streamlined modules; a batch and incremental processor, an automatic eight drawer dryer, a combination UVA and UVC light finisher and an eight drawer stacker.

Each unit can be bought separately so the InLiner system can be built up over time. As your business grows, the system grows with it.




An integrated plate feed holder and an eight bar storage rack make plate loading easy and efficient.



The automatic "pop-up" pneumatic punch is programmable and provides simple, efficient pin bar mounting.



The large, full color touch screen is designed for operator peace of mind. It utilizes pictograms, not words, to monitor the processing steps and video cameras to monitor the plate transfer between units. Remote diagnostics are available and key component "end of life" warnings display the part number and part picture to minimize or prevent downtime.

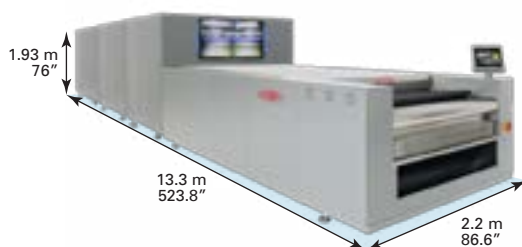

Floor Plan



Play Video

[Click for animated demonstration of Modular InLiner features.](#)

# DuPont™ Cyrel® 3000 Modular InLiner System

## Plate Processing Through Finishing in One Linear Design



A wide screen TV displays the plate transit between the wash out and dryer, between the dryer and light finisher and from the light finisher into the stacker. This provides real time video to the operator of machine status as well as an early warning of any plate path issues.

The Cyrel® 3000 Modular InLiner is the culmination of over 35 years designing, building and supplying machinery for the Graphics Arts Industry.

For more information on DuPont™ Cyrel® or other DuPont Packaging Graphics products, please contact your local representative. Some contact information may have changed, for the most current information [CLICK HERE](#).

### DuPont China Holding Co., LTD – Shanghai

Bldg 11, 399 Keyuan Road,  
Zhangjiang Hi-Tech Park,  
Pudong New District,  
Shanghai 201203 China  
Tel: (86) 21 3862 2888

### DuPont Malaysia Sdn Bhd

Level 7, Menara CIMB, Jalan Stesen  
Sentral 2,  
Kuala Lumpur Sentral,  
50490 Kuala Lumpur, Malaysia  
Tel: (60) 3 2859 0700

### DuPont K.K. – Japan

Sanno Park Tower, 11-1,  
Nagata-cho 2-chrome,  
Chiyoda-ku, Tokyo 100-6111, Japan  
Tel: (81) 3 5521 8520

### DuPont Australia, LTD

Level 2, 785 Toorak Road,  
Hawthorn East, 3123,  
Victoria, Australia  
Tel: (61) 3 9935 5699

### E.I. DuPont India Private Limited

1001-1012, 'Meadows',  
10th Floor, Sahar-Plaza Complex,  
Andheri-Kurla Road,  
Andheri (East), Mumbai 400 059,  
India  
Tel: (91) 22 6751 5000

Technical Data		
General	Details	Other Notes
<b>Equipment Name</b>	DuPont™ Cyrel® 3000 Modular InLiner	An integrated system consisting of four streamlined modules; a batch and incremental processor, an automatic eight draw dryer, a combination UVA and UVC light finisher and an eight draw stacker.
<b>SAP Article Number</b>	D15272554	
<b>Plate Thickness</b>	1.14 mm to 7.0mm (.045" to 0.276")	
<b>Max. Nominal Plate Width</b>	1,320mm (52")	
<b>Min. Nominal Plate Width</b>	200mm (7.87")	
<b>Max. Nominal Plate Length</b>	2032mm (80.0")	
<b>Min. Solvent Volume for Operation</b>	250 liters (66 gallons US)	
<b>Max. Solvent Volume for Operation</b>	300 liters (79.2 gallons US)	
<b>Max. Tank Volume</b>	320 liters (84.5 gallons US)	
<b>Electrical (Field Configurable)</b>	400 Volt 50/60 Hz 230 Volt 50/60 Hz	3Ph / N / PE 3Ph / GND
<b>Power (nominal)</b>	9 kW	
<b>Current (Nominal Load)</b>	32 Amp @ 400 Volt 55 Amp @ 230 Volt	
<b>Grounding</b>	< 0.1 Ω	Ground bar to equipment frame and to electrical supply ground
<b>Exhaust</b>	Processor Dryer LF Stacker	1 x 140mm Ø @ 600m3/hr (21,1883ft) 1 x 140mm Ø @ 500m3/hr (17,6573ft) 2 x 140mm Ø @ 500m3/hr (17,6573ft) ea
<b>Environmental Data</b>	Temperature range: Optimal 18°C to 25°C (64°F to 77°F) Maximum 29°C (84°F)	Relative humidity from 25% to 65% non-condensing
<b>Compressed Air Supply</b>	6 bar minimum (90 psi)	1 x 6mm Ø connection, push connect
<b>Solvent In and Out</b>	2 x 16mm Ø	1/2" adaptors included
<b>Dimensions Assembled (L x W x H)</b>	Complete InLiner 1331 x 220 x 193cm (523.8 x 86.6 x 76")	
<b>Dimensions</b>	<b>Crated</b> Processor (L x W x H) 426 x 227 x 167cm (167.7 x 89.4 x 65.7") Exit Table (L x W x H) 274 x 227 x 167cm (107.8 x 89.4 x 65.7") Dryer (L x W x H) 277 x 228 x 227cm (109 x 89.7 x 89.3") LF Stacker (L x W x H) 458 x 228 x 227cm (180.3 x 89.7 x 89.3")	<b>Uncrated</b> 407 x 220 x 115cm (160.2 x 86.6 x 45.3") 259 x 220 x 115cm (102 x 86.6 x 45.3") 242 x 220 x 193cm (95.2 x 86.6 x 76") 423 x 220 x 193cm (166.5 x 86.6 x 76")
<b>Weight Assembled</b>	5960 kg (13,139.5 lbs)	
<b>Weight By Section</b>	<b>Crated</b> Processor 2600 kg (5732 lbs) Exit Table 1140 kg (2513 lbs) Dryer 2100 kg (4629 lbs) LF Stacker 2900 kg (6393 lbs)	<b>Uncrated</b> 1860 kg (4100 lbs) 700 kg (1543 lbs) 1500 kg (3307 lbs) 1900 kg (4188 lbs)
<b>Color</b>	DuPont Grey & DuPont Red	Stainless Top Lids

[www.cyrel.com/ap](http://www.cyrel.com/ap)